



## ONE-WAY VISION

# PERF 40

### EXTERNAL APPLICATION



Similar to PERF 30, PERF 40 film gives you the possibility to communicate visually while keeping visibility towards the outside (thanks to its micro perforations). It is an outside installation. Ideal in the technical inability to install PERF 30 indoor.



**Durability:** from 12 to 15 years for vertical application in central Europe.



**Use:** Réfectiv window films are designed for use on any type of clear normal glass.



**Maintenance after 30 days:** with usual cleaning solutions (non-abrasive, without ammonia...). Cleaning products that may scratch the film should be avoided.




**Storage:** 2 years from delivery. This film should be kept away from excessive humidity and sun rays, at temperatures below 38°C.

In order to constantly improve our production we may change a product colour and manufacturing process without prior notice.

### INFORMATION

**MATERIAL:** .....Polymeric PVC  
**ADHESIVE :** Adhesive solvent polyacrylate removeable  
**LINER :** .....Siliconed paper 155 microns  
**TOTAL THICKNESS:** .....330 microns  
**COLOR:** .....White (Black Glue Side)  
**VISIBLE PERFORATION:** .....40 %  
**INK TYPES:** .....Eco-solvent / solvent  
**APPLICATION FACE :** .....Outside  
**THERMAL RESISTANCE :** .....From -20° to 80°C  
**APPLICATION T° :** .....From 10° to 40°C  
**FIRE RATING:** .....B-S1, D0  
**STANDARDS:** .....EUROCLASSES  
**WARRANTY:** .....3 years\*  
**DIMENSION:** .....1,52 X 10 m - 1,52 X 50 m

\*for glazing not exposed to the sun

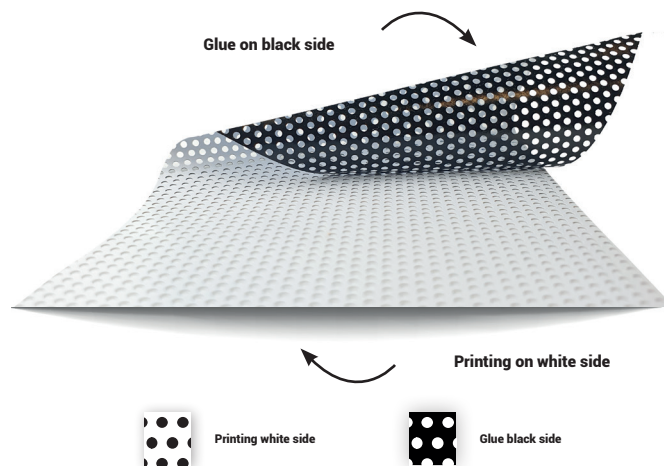

### Application Method

The glass surface to be glued on has to be free from dust, grease or other contaminants. Some specific materials such as polycarbonate can cause air bubble problems. Therefore, a compatibility test is recommended. For more precision we recommend to refer back to the application table.

### Production and standards

In order to constantly improve our production we may change a product colour and manufacturing process without prior notice. Before applying our products we recommend that our users ensure that the film is suitable for the intended use and comply with current standards.