

Magnetic Sheeting with Standard Adhesive


PRODUCT DESCRIPTION:

- Standard Adhesive is a Solvent-based Pressure Sensitive Acrylic Adhesive.
- Standard Adhesive is laminated on the non-magnetic side of Magnetic Sheeting.
- Magnetic Sheeting has a UV hardened coating on the magnetic side.
- Suitable for general indoor applications.
- Easy to cut, apply, remove and change.


USE AND STORAGE:

- Working Temperature: 10°C - 35°C, Short Term Resistance: 50°C, Relative Humidity: 20% - 60%.
- Handling: Keep away from open flame or other non-processing sources of ignition.
- Storage: Avoid sunlight, temperature 10°C - 35°C, relative humidity 20% - 60%.
- Shelf life: 12 months, unfinished product should be re-packed and kept in normal storage conditions.

PRODUCT CONSTRUCTION:



PACKAGING:

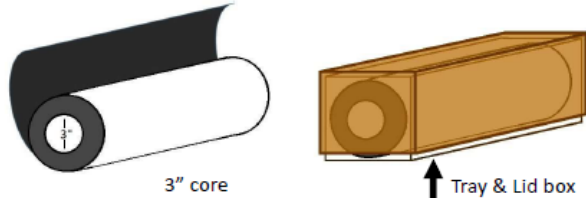

PHYSICAL PROPERTIES:

Flexibility: Can be wrapped around a rod with a 12mm radius at 20°C without cracking.

Cutting: Scissor cutting, knife-cutting, die-cutting, and slitting can be done with ease.

ADHESIVE DATA:

Adhesive: A thin carrier of solvent-based acrylic adhesive that offers medium tack and adhesion but low shear properties.

Adhesive Data	Unit	Value	Test Method
Peel 180° on stainless steel	N/25mm	≥ 10	GB/T2792-1998
Measurement of static shear adhesion	min/24*24mm	≥ 90	GB/T4851-1998

Notes:

1. Not recommended for use on plastic substrates.
2. User should test its performance on individual application surface.

Standard widths: 610mm, 620mm, 1000mm, 1200mm, 1260mm