



### Description

<b>Material</b>	Self adhesive 100% polyester textile, coated on one side
<b>Coating</b>	White, satin coating
<b>Properties</b>	High stability against environmental influences Fast drying Brilliant colour reproduction No reflections on the printed surface Suitable for wall decoration
<b>Application</b>	Indoor: art prints and wall decoration
<b>Durability</b>	For medium-term use depending on the ink
<b>Inks</b>	Eco solvent, solvent, latex and UV curable inks


### Laminating

We recommend protecting the printer surface when it is subjected to abrasion, moisture or other mechanical influences. In this case, we recommend protecting the image with an appropriate liquid lamination.

### Technical Data

<b>Fabric base</b>	100% polyester textile, 230 g/m <sup>2</sup> , 240 μ, satin white coating
<b>Adhesive</b>	Acrylic UV hot melt, water and heat high resistance, 30 g/m <sup>2</sup>
<b>Liner</b>	Clay coated paper, 80 g/m <sup>2</sup>
<b>Final product</b>	self adhesive 100% polyester textile, satin white coating
<b>Weight</b>	340 g/m <sup>2</sup>
<b>Peel 180° Method FTM1 (n/25 mm)</b>	After 20 min. 1,1 Newtons After 4 hours. 1,1 Newtons After 24 hours. 1,2 Newtons

### Availabilities

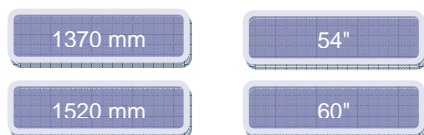

**Roll length** 20 m (any other length can be produced under request)

### Storage

After printing we recommend to remove the remaining roll from the plotter and to keep the canvas in the original packaging in a cool and dry environment.

### Notes

Slight colour deviations can occur from production to production.