


## **SOLAR FILM IR 95** CERAMIC FILM

SUPPORT :	Vinyl
ADHESIVE :	Acrylic polymer
PROTECTOR :	Siliconized PET 23 microns
THICKNESS :	70 microns
COLOUR :	Black
APPLICATION SIDE :	Internal
VISIBLE LIGHT TRANSMISSION :	4,3 %
UV BLOCKING :	99 %
INFRARED REFLECTION :	79 %
APPLICATION T° :	min, + 5°C
FIRE RATING :	B-s1, d0
GUARANTEE : *For glazing not exposed to the sun	2 / 3 years depending on exposure to the sun*
BY ROLL :	



**NFORMATION** 

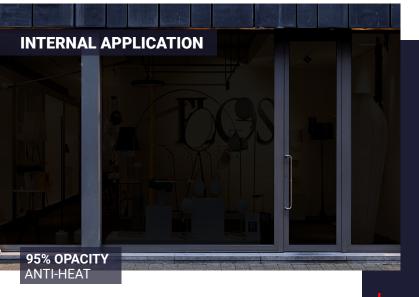


## DESCRIPTION

Our black IR 95 film is perfect for darkening windows and protecting against the sun. It prevents excessive indoor heat and, above all, glare. For a long-lasting application, apply a sealant around the edge of the film.



DURABILITY: 2 to 3 years for vertical applications in Central Europe.



MAINTENANCE : After 30 days with a standard cleaning solution (non-abrasive, ammonia-free, etc.). Do not use cleaning products that could scratch the surface.

STORAGE: 2 years from delivery. This film should be stored away from excessive humidity and sunlight, at a temperature below 38°C.

In order to meet the highest standards, we recommend that you do not mix films from different productions

## METHOD OF APPLICATION

MENSIONS

The surface to be bonded must be free from dust, grease or any other contaminant. Some materials, such as polycarbonate, can cause bubbling problems. А compatibility test is , Can be therefore recommended. installed on plexiglass and polycarbonate.

## **PRODUCTION AND STANDARDS**

In order to constantly improve our products, we may modify colours and manufacturing processes without prior notice. Before applying our films, we recommend that users ensure that they are suitable for the intended use and comply with current standards.

Application Note



Vidéo of the pose



🕨 SCAN ME

:+33 (0)1 43 99 00 22

: info@reflectiv.com

: www.reflectiv.com

Showroom : 36 rue Réaumur 75003 Paris

Head office : P.A. des petits carreaux

2 avenue des Orangers 94380 Bonneuil sur Marne - France